

# POLARIS UTILITY PRODUCTS

## Streetlight Connectors

### TYPE: SLWB/SLOWB Submersible Streetlight Connector

- Designed for use in Submersible installations such as handholes and below grade boxes
- Insulated with High Dielectric Strength Plastisol
- Molded for precise fit and supplied with removable access plugs over the hex screws
- Eliminates the need for cover and taping
- Abrasion and chemical resistant
- Will not support combustion
- Cold Temperature Rated to -45 degrees C

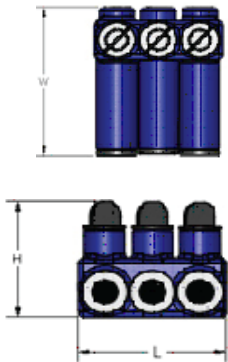


Figure 1



Figure 2



Rocket is used for wire sizes #2 - 14 AWG

Catalog Number	Number of Ports	Figure Number	Wire Range AWG	Hex size	Dimensions, Inches		
					H	W	L
SLWB2/0-2	2	1	2/0-14	3/16	2.00	2.50	1.80
SLWB2/0-3	3	1	2/0-14	3/16	2.00	2.50	2.65
SLWB2/0-4	4	1	2/0-14	3/16	2.00	2.50	3.49
SLWB2/0-5	5	1	2/0-14	3/16	2.00	2.50	4.33
SLWB2/0-6	6	1	2/0-14	3/16	2.00	2.50	5.17
SLWB2/0-7	7	1	2/0-14	3/16	2.00	2.50	6.01
SLWB2/0-8	8	1	2/0-14	3/16	2.00	2.50	6.85
SLWB2/0-9	9	1	2/0-14	3/16	2.00	2.50	7.69
SLWB2/0-10	10	1	2/0-14	3/16	2.00	2.50	8.53
SLOWB2/0-21	3	2	2/0-14	3/16	2.00	4.00	2.65
SLOWB2/0-22	4	2	2/0-14	3/16	2.00	4.00	3.49
SLOWB2/0-31	4	2	2/0-14	3/16	2.00	4.00	3.49
SLOWB2/0-32	5	2	2/0-14	3/16	2.00	4.00	4.33
SLOWB2/0-33	6	2	2/0-14	3/16	2.00	4.00	5.17
SLOWB2/0-42	6	2	2/0-14	3/16	2.00	4.00	5.17

\* Connector is used without Rockets for wire sizes 2/0-#1

\* Inverted Rocket is used for wire sizes #2-14 AWG

**POLARIS CUSTOMER SERVICE : 877-584-5847**